

Indoor packaged unit

WRE 40 - 750 kW



Available from June 2020



Erp 2021



Scroll
compressor



Refrigerant
R-410A



Cooling only



Heating/
Cooling

PLUS

- » Electronic expansion valve
- » Up to 6 compressors
- » 1 or 2 cooling circuits
- » Remote connectivity with the most common protocols
- » Compact dimensions
- » 3 different acoustic configurations
- » High seasonal efficiency values

Water-water unit with high seasonal efficiency


WRE is the new Galletti series of self-contained reversible heat pumps and water chillers for indoor installation, suitable for both air conditioning and industrial process applications. The range covers capacities from 40 kW up to a maximum of 750 kW and is characterised by extremely high levels of seasonal efficiency (in compliance with ErP 2021 requirements) and reduced space requirements in order to facilitate access to technical compartments (for capacities of up to 560 kW, the width and height are less than 88 cm and 190 cm respectively). In order to increase the efficiency at partial loads, WRE models are provided with tandem or trio solutions (2 or 3 compressors on a single circuit) and equipped with electronic expansion valve as standard. Both single and dual circuit versions are available.

The use of top quality components at the cutting edge of technology in cooling, hydraulic, and electrical systems makes WRE chillers state of the art in terms of efficiency, reliability, and operating limits. In fact, the ability to produce water from -8 °C to 55 °C and use any type of natural source for dissipation is guaranteed: soil, ground water, or outside air.

The high configurability of the series, which is in the DNA of Galletti, is guaranteed by 2 different versions, with and without closing panels, and 3 different acoustic configurations: standard, low noise, and super low noise, able to ensure a sound power level reduction of up to 12 dB(A). The range of the configuration available is completed by the possibility of producing hot water up to 60 °C at zero cost through partial heat recovery.

Lastly, the advanced microprocessor that regulates the operation of the unit allows the control of a maximum of 2 pumps on the equipment side and 2 pumps on the source side, on/off or modulating, the possibility of cascade connection of up to 4 units and management of reversibility on both the gas side and the water side.

The possibility of keeping the evaporator indoors means there is no need to add glycol to the water inside the system. In addition, you can keep all components requiring maintenance in an easily accessible room.

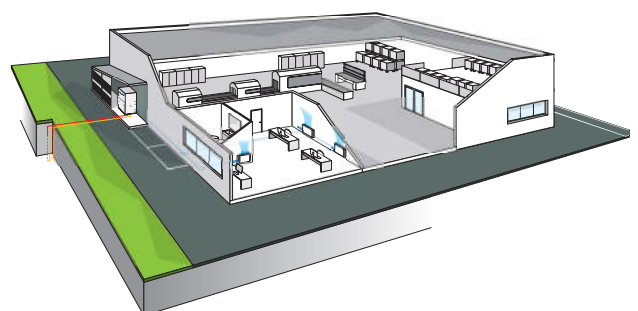

COMPONENTI PRINCIPALI

Structure

Made in galvanised steel sheet with a polyester powder coating for outdoors.

On request the compressor compartment is completely sealed and accessible on 3 sides thanks to easily removable panels that greatly simplify all maintenance and inspection operations.

Compressori scroll

Scroll-type compressors in a tandem or trio configuration equipped with IDV valve. The IDV intermediate delivery valve technology allows the compressor to avoid losses caused by overcompression and, consequently, the additional work the motor has to perform in partial-load operation, saving energy and improving seasonal and partial-load efficiency from 3% to 10%.



Heat exchangers

All units have heat exchangers with braze-welded AISI 316 austenitic stainless steel plates and connections made of AISI 316 L, characterised by a reduced carbon content to facilitate brazing.

Cooling circuit

It can be produced in 2 different versions with the same power rating (Efficiency Pack); using mainly: R410A scroll compressors, brazed plate heat exchangers, and electronic expansion valves.



Electronic microprocessor control

It allows complete management of the unit. The electronic control system allows the setpoint to be adjusted automatically according to the outdoor temperature in order to reduce consumption and broaden the working temperature range. With the advanced microprocessor control it is possible to set up LAN networks for controlling 4 units in parallel.

CONFIGURATOR

The models are completely configurable by selecting the version and the options. To the right is shown an example of configuration.

Version	Field	1	2	3	4	5	6	7	8	9	10
WRE132HL		2	B	0	P	0	1	G	0	0	2

To verify the compatibility of the options, use the selection software or the price list.

AVAILABLE VERSIONS

Only cooling versions

WRE...CS
WRE...CL
WRE...CQ

Standard execution
Low noise execution
Super low noise execution

Heat pump versions

WRE...HS
WRE...HL
WRE...HQ

Reversible, standard execution
Reversible, low noise execution
Reversible, super low noise execution

CONFIGURATION OPTIONS

1 Power supply

- 0 400 - 3 - 50 + N
- 1 400 - 3 - 50
- 2 400 - 3 - 50 + N + circuit breakers
- 3 400 - 3 - 50 + circuit breakers

2 Control microprocessor and lamination device

- B Advanced + electronic expansion valve

3 Partial heat recovery

- 0 Absent
- D Desuperheater (partial heat recovery)

4 Management of source side pumps

- 1 Single pump
- 2 Dual pump
- 3 Single pump + condensation control with 0-10V modulated output signal
- 4 Dual pump + condensation control with 0-10V modulated output signal

5 User water flow modulation

- 1 Single pump
- 2 Dual pump
- 3 Single pump + output signal with air flow modulation in ΔT logic = cost
- 4 Dual pump + output signal with air flow modulation in ΔT logic = cost
- 5 Single pump + output signal with air flow modulation in T logic = cost
- 6 Dual pump + output signal with air flow modulation in T logic = cost

6 Remote communication

- 0 Absent
- 1 RS485 serial card (Modbus or Carel protocol)
- 2 Lonworks serial card
- 4 Ethernet card (SNMP or BACNET protocol) + clock card
- 5 Ethernet card + clock card + monitoring software

7 Anti vibration shock mounts

- 0 Absent
- G Rubber vibration dampers at the base of the unit
- M Spring vibration dampers at the base of the unit

8 Packing

- 0 Standard
- 1 Wooden cage
- 2 Wooden crate

9 Remote control

- 0 Absent
- 1 Simplified remote control panel
- 3 Remote display for programmable microprocessor

10 Anti-intrusion panelling

- 0 Absent
- P Present (standard for Q version)

ACCESSORIES

A	Power factor capacitors	H	Refrigerant pressure gauges
B	Soft starter	I	Two pairs of Victaulic joints
C	Service kit (advanced controller required)	L	Filter regulating kit
D	Water side cooling / heating mode inversion management	M	Set point compensation outdoor temperature probe
E	ON/OFF status of the compressors	N	Compressor tandem/trio isolation valves
F	Remote control for step capacity limit (advanced controller required)	P	Unit lifting pipes
G	Configurable digital alarm board (advanced controller required)	Q	Temperature probe for pump shutdown on the primary circuit

Water chillers and heat pumps WRE

PRELIMINARY TECHNICAL DATA

RATED TECHNICAL DATA OF WRE C WATER CHILLERS

WRE C			052	062	072	082	092	122	132	
Power supply		V-ph-Hz	400 - 3N - 50							
Cooling capacity	(1)	kW	46,4	58,1	67,6	79,4	91,5	118	134	
Total power input	(1)	kW	11,2	13,9	16,2	18,9	21,7	27,7	31,4	
EER	(1)		4,15	4,18	4,19	4,21	4,21	4,26	4,26	
SEER	(2)		5,48	5,71	5,75	5,53	5,84	5,55	5,53	
Water flow user side	(1)	l/h	8039	10059	11708	13750	15824	20386	23176	
Water pressure drop user side	(1)	kPa	49	50	48	48	48	47	47	
Water flow source side	(1)	l/h	9811	12275	14299	16786	19329	24876	28291	
Water pressure drop source side	(1)	kPa	76	76	72	73	74	70	70	
Maximum current absorption		A	29	36	42	49	57	72	81	
Star up current		A	112	161	211	218	178	288	296	
Startup current with soft starter		A	67	97	127	131	107	173	178	
Compressors / circuits			2 / 1							
Sound power level	(3)	dB(A)	73	75	76	77	80	80	82	
Sound power level, low-noise version	(3)	dB(A)	67	69	70	71	74	74	76	
Sound power level quiet version	(3)	dB(A)	61	63	64	65	68	68	70	

WRE C			152	154	182	184	212	214	242	
Power supply		V-ph-Hz	400 - 3N - 50							
Cooling capacity	(1)	kW	155	147	180	183	213	212	239	
Total power input	(1)	kW	36,2	35,0	41,0	42,6	48,4	48,9	53,3	
EER	(1)		4,27	4,20	4,40	4,30	4,40	4,34	4,48	
SEER	(2)		5,80	5,30	5,83	6,31	5,60	5,95	5,53	
Water flow user side	(1)	l/h	26731	25439	31108	31648	36805	36633	41177	
Water pressure drop user side	(1)	kPa	48	35	39	38	41	41	37	
Water flow source side	(1)	l/h	32630	31209	37834	38659	44746	44661	49956	
Water pressure drop source side	(1)	kPa	73	52	60	58	63	63	57	
Maximum current absorption		A	91	90	112	114	130	128	151	
Star up current		A	356	224	380	293	399	307	420	
Startup current with soft starter		A	214	153	228	199	239	210	252	
Compressors / circuits			2 / 1	4 / 2	2 / 1	4 / 2	2 / 1	4 / 2	2 / 1	
Sound power level	(3)	dB(A)	87	79	87	83	89	83	89	
Sound power level, low-noise version	(3)	dB(A)	81	73	83	77	84	77	85	
Sound power level quiet version	(3)	dB(A)	75	67	77	71	78	71	79	

WRE C			244	274	302	314	364	384	454	
Power supply		V-ph-Hz	400 - 3N - 50							
Cooling capacity	(1)	kW	236	268	297	311	359	384	455	
Total power input	(1)	kW	54,7	62,3	66,8	71,4	82,1	88,0	93,7	
EER	(1)		4,32	4,31	4,44	4,36	4,37	4,36	4,85	
SEER	(2)		5,96	5,91	5,55	6,22	6,19	5,92	6,50	
Water flow user side	(1)	l/h	40771	46351	51222	53778	61945	66331	78388	
Water pressure drop user side	(1)	kPa	44	45	44	45	46	46	30	
Water flow source side	(1)	l/h	49753	56582	62192	65488	75423	80796	93937	
Water pressure drop source side	(1)	kPa	65	68	67	70	70	70	50	
Maximum current absorption		A	144	161	166	182	224	240	261	
Star up current		A	360	377	510	447	492	508	529	
Startup current with soft starter		A	244	259	306	305	340	353	369	
Compressors / circuits			4 / 2	4 / 2	2 / 1	4 / 2	4 / 2	4 / 2	4 / 2	
Sound power level	(3)	dB(A)	83	85	91	90	90	90	92	
Sound power level, low-noise version	(3)	dB(A)	77	79	88	84	86	86	87	
Sound power level quiet version	(3)	dB(A)	71	73	82	78	80	80	81	

(1) Water temperature - user side 12°C / 7°C, water temperature - dissipation side 30°C / 35°C (EN14511:2013)

(2) η efficiency values for heating and cooling are respectively calculated by the following formulas: $[\eta = SCOP / 2,5 - F(1) - F(2)]$ e $[\eta = SEER / 2,5 - F(1) - F(2)]$. For further information, please refer to the technical document "ErP 2009/125/EC DIRECTIVE" in the catalogue introducing pages, or to the EN14825:2017 regulation.

(3) Sound power level measured according to ISO 9614

RATED TECHNICAL DATA OF WRE C WATER CHILLERS

WRE C			504	564	606	636	696	746
Power supply		V-ph-Hz	400 - 3N - 50					
Cooling capacity	(1)	kW	507	560	591	637	690	740
Total power input	(1)	kW	104	118	127	138	148	157
EER	(1)		4,87	4,76	4,65	4,61	4,66	4,70
SEER	(2)		6,56	6,52	6,56	6,51	6,53	6,57
Water flow user side	(1)	l/h	87446	96631	102014	109992	119104	127763
Water pressure drop user side	(1)	kPa	35	43	43	46	46	46
Water flow source side	(1)	l/h	104625	115953	122913	132689	143412	153615
Water pressure drop source side	(1)	kPa	59	70	70	75	74	75
Maximum current absorption		A	303	317	328	370	412	454
Star up current		A	571	661	593	638	680	722
Startup current with soft starter		A	403	460	421	457	491	524
Compressors / circuits			4 / 2	4 / 2	6 / 2	6 / 2	6 / 2	6 / 2
Sound power level	(3)	dB(A)	92	93	94	94	94	94
Sound power level, low-noise version	(3)	dB(A)	88	90	88	89	89	90
Sound power level quiet version	(3)	dB(A)	82	84	82	83	83	84

(1) Water temperature - user side 12°C / 7°C, water temperature - dissipation side 30°C / 35°C (EN14511:2013)

(2) η efficiency values for heating and cooling are respectively calculated by the following formulas: $[\eta = SCOP / 2,5 - F(1) - F(2)]$ e $[\eta = SEER / 2,5 - F(1) - F(2)]$. For further information, please refer to the technical document "ErP 2009/125/EC DIRECTIVE" in the catalogue introducing pages, or to the EN14825:2017 regulation.

(3) Sound power level measured according to ISO 9614

RATED TECHNICAL DATA OF WRE H REVERSIBLE HEAT PUMPS

WRE H			052	062	072	082	092	122	132
Power supply		V-ph-Hz	400 - 3N - 50						
Cooling capacity	(1)	kW	46,4	58,1	67,6	79,4	91,5	118	134
Total power input	(1)	kW	11,2	13,9	16,2	18,9	21,7	27,7	31,4
EER	(1)		4,15	4,18	4,19	4,21	4,21	4,26	4,26
SEER	(2)		5,48	5,71	5,75	5,53	5,84	5,55	5,53
Water flow user side	(1)	l/h	8039	10059	11708	13750	15824	20386	23176
Water pressure drop user side	(1)	kPa	49	50	48	48	48	47	47
Water flow source side	(1)	l/h	9811	12275	14299	16786	19329	24876	28291
Water pressure drop source side	(1)	kPa	76	76	72	73	74	70	70
Heating capacity	(3)	kW	54,0	67,4	78,6	92,2	106	136	155
Total power input	(3)	kW	14,2	17,5	20,3	23,6	27,3	34,7	39,6
COP	(3)		3,81	3,85	3,88	3,91	3,88	3,92	3,92
SCOP	(2)		5,01	5,08	5,11	5,05	5,17	5,06	5,09
Heating energy efficiency class	(4)		A+++						
Water flow user side	(3)	l/h	9206	11497	13423	15742	18122	23258	26487
Water pressure drop user side	(3)	kPa	67	67	63	64	65	61	62
Water flow source side	(3)	l/h	11624	14542	16988	19960	22917	29441	33512
Water pressure drop source side	(3)	kPa	107	107	102	103	104	98	99
Maximum current absorption		A	29	36	42	49	57	72	81
Star up current		A	112	161	211	218	178	288	296
Startup current with soft starter		A	67	97	127	131	107	173	178
Compressors / circuits			2 / 1						
Sound power level	(5)	dB(A)	73	75	76	77	80	80	82
Sound power level, low-noise version	(5)	dB(A)	67	69	70	71	74	74	76
Sound power level quiet version	(5)	dB(A)	61	63	64	65	68	68	70

(1) Water temperature - user side 12°C / 7°C, water temperature - dissipation side 30°C / 35°C (EN14511:2013)

(2) η efficiency values for heating and cooling are respectively calculated by the following formulas: $[\eta = SCOP / 2,5 - F(1) - F(2)]$ e $[\eta = SEER / 2,5 - F(1) - F(2)]$. For further information, please refer to the technical document ErP 2009/125/EC DIRECTIVE in the catalogue introducing pages, or to the EN14825:2017 regulation.

(3) Water temperature - user side 40°C / 45°C, water temperature - source side 10°C / 7°C (EN14511:2013)

(4) Seasonal energy efficiency class for LOW TEMPERATURE room heating under AVERAGE climatic conditions [EUROPEAN REGULATION No 811/2013]

(5) Sound power level measured according to ISO 9614

RATED TECHNICAL DATA OF WRE H REVERSIBLE HEAT PUMPS

WRE H			152	154	182	184	212	214	242
Power supply		V-ph-Hz	400 - 3N - 50						
Cooling capacity	(1)	kW	155	147	180	183	213	212	239
Total power input	(1)	kW	36,2	35,0	41,0	42,6	48,4	48,9	53,3
EER	(1)		4,27	4,20	4,40	4,30	4,40	4,34	4,48
SEER	(2)		5,80	5,30	5,83	6,31	5,60	5,95	5,53
Water flow user side	(1)	l/h	26731	25439	31108	31648	36805	36633	41177
Water pressure drop user side	(1)	kPa	48	35	39	38	41	41	37
Water flow source side	(1)	l/h	32630	31209	37834	38659	44746	44661	49956
Water pressure drop source side	(1)	kPa	73	52	60	58	63	63	57
Heating capacity	(3)	kW	179	166	176	212	244	244	272
Total power input	(3)	kW	45,4	43,7	50,4	53,5	60,8	61,5	66,9
COP	(3)		3,93	3,81	3,50	3,96	4,02	3,97	4,06
SCOP	(2)		5,18	4,92	5,18	5,56	5,14	5,44	5,06
Heating energy efficiency class	(4)		A+++						
Water flow user side	(3)	l/h	30532	28494	30226	36244	41779	41755	46509
Water pressure drop user side	(3)	kPa	64	44	38	51	55	55	49
Water flow source side	(3)	l/h	38672	35530	36430	45833	53143	52896	59272
Water pressure drop source side	(3)	kPa	102	68	55	81	89	88	80
Maximum current absorption		A	91	90	112	114	130	128	151
Star up current		A	356	224	380	293	399	307	420
Startup current with soft starter		A	214	153	228	199	239	210	252
Compressors / circuits			2 / 1	4 / 2	2 / 1	4 / 2	2 / 1	4 / 2	2 / 1
Sound power level	(5)	dB(A)	87	79	87	83	89	83	89
Sound power level, low-noise version	(5)	dB(A)	81	73	83	77	84	77	85
Sound power level quiet version	(5)	dB(A)	75	67	77	71	78	71	79

(1) Water temperature - user side 12°C / 7°C, water temperature - dissipation side 30°C / 35°C (EN14511:2013)

(2) η efficiency values for heating and cooling are respectively calculated by the following formulas: $[\eta = SCOP / 2,5 - F(1) - F(2)]$ e $[\eta = SEER / 2,5 - F(1) - F(2)]$. For further information, please refer to the technical document ErP 2009/125/EC DIRECTIVE in the catalogue introducing pages, or to the EN14825:2017 regulation.

(3) Water temperature - user side 40°C / 45°C, water temperature - source side 10°C / 7°C (EN14511:2013)

(4) Seasonal energy efficiency class for LOW TEMPERATURE room heating under AVERAGE climatic conditions [EUROPEAN REGULATION No 811/2013]

(5) Sound power level measured according to ISO 9614

RATED TECHNICAL DATA OF WRE H REVERSIBLE HEAT PUMPS

WRE H			244	274	302	314	364	384	454
Power supply		V-ph-Hz	400 - 3N - 50						
Cooling capacity	(1)	kW	236	268	297	311	359	384	455
Total power input	(1)	kW	54,7	62,3	66,8	71,4	82,1	88,0	93,7
EER	(1)		4,32	4,31	4,44	4,36	4,37	4,36	4,85
SEER	(2)		5,96	5,91	5,55	6,22	6,19	5,92	6,50
Water flow user side	(1)	l/h	40771	46351	51222	53778	61945	66331	78388
Water pressure drop user side	(1)	kPa	44	45	44	45	46	46	30
Water flow source side	(1)	l/h	49753	56582	62192	65488	75423	80796	93937
Water pressure drop source side	(1)	kPa	65	68	67	70	70	70	50
Heating capacity	(3)	kW	272	311	342	358	413	444	513
Total power input	(3)	kW	68,7	78,3	83,6	90,2	103	109	117
COP	(3)		3,96	3,97	4,09	3,97	4,01	4,06	4,40
SCOP	(2)		5,41	5,42	5,09	5,55	5,50	5,39	5,95
Heating energy efficiency class	(4)		A+++						
Water flow user side	(3)	l/h	46516	53155	58549	61233	70720	76052	87927
Water pressure drop user side	(3)	kPa	57	60	59	61	62	62	44
Water flow source side	(3)	l/h	58882	67373	74947	77619	89923	97124	114599
Water pressure drop source side	(3)	kPa	91	96	97	99	100	101	74
Maximum current absorption		A	144	161	166	182	224	240	261
Star up current		A	360	377	510	447	492	508	529
Startup current with soft starter		A	244	259	306	305	340	353	369
Compressors / circuits			4 / 2	4 / 2	2 / 1	4 / 2	4 / 2	4 / 2	4 / 2
Sound power level	(5)	dB(A)	83	85	91	90	90	90	92
Sound power level, low-noise version	(5)	dB(A)	77	79	88	84	86	86	87
Sound power level quiet version	(5)	dB(A)	71	73	82	78	80	80	81

(1) Water temperature - user side 12°C / 7°C, water temperature - dissipation side 30°C / 35°C (EN14511:2013)

(2) η efficiency values for heating and cooling are respectively calculated by the following formulas: $[\eta = SCOP / 2,5 - F(1) - F(2)]$ e $[\eta = SEER / 2,5 - F(1) - F(2)]$. For further information, please refer to the technical document ErP 2009/125/EC DIRECTIVE in the catalogue introducing pages, or to the EN14825:2017 regulation.

(3) Water temperature - user side 40°C / 45°C, water temperature - source side 10°C / 7°C (EN14511:2013)

(4) Seasonal energy efficiency class for LOW TEMPERATURE room heating under AVERAGE climatic conditions [EUROPEAN REGULATION No 811/2013]

(5) Sound power level measured according to ISO 9614

RATED TECHNICAL DATA OF WRE H REVERSIBLE HEAT PUMPS

WRE H			504	564	606	636	696	746
Power supply		V-ph-Hz	400 - 3N - 50					
Cooling capacity	(1)	kW	507	560	591	637	690	740
Total power input	(1)	kW	104	118	127	138	148	157
EER	(1)		4,87	4,76	4,65	4,61	4,66	4,70
SEER	(2)		6,56	6,52	6,56	6,51	6,53	6,57
Water flow user side	(1)	l/h	87446	96631	102014	109992	119104	127763
Water pressure drop user side	(1)	kPa	35	43	43	46	46	46
Water flow source side	(1)	l/h	104625	115953	122913	132689	143412	153615
Water pressure drop source side	(1)	kPa	59	70	70	75	74	75
Heating capacity	(3)	kW	571	637	672	728	784	843
Total power input	(3)	kW	130	148	158	172	185	197
COP	(3)		4,38	4,31	4,24	4,22	4,25	4,28
SCOP	(2)		5,92	5,88	5,97	5,85	5,86	5,88
Heating energy efficiency class	(4)		A+++					
Water flow user side	(3)	l/h	97835	109049	115069	124564	134230	144275
Water pressure drop user side	(3)	kPa	52	62	62	66	65	66
Water flow source side	(3)	l/h	127625	141850	148919	161126	173871	187362
Water pressure drop source side	(3)	kPa	88	104	103	111	109	111
Maximum current absorption		A	303	317	328	370	412	454
Star up current		A	571	661	593	638	680	722
Startup current with soft starter		A	403	460	421	457	491	524
Compressors / circuits			4 / 2	4 / 2	6 / 2	6 / 2	6 / 2	6 / 2
Sound power level	(5)	dB(A)	92	93	94	94	94	94
Sound power level, low-noise version	(5)	dB(A)	88	90	88	89	89	90
Sound power level quiet version	(5)	dB(A)	82	84	82	83	83	84

(1) Water temperature - user side 12°C / 7°C, water temperature - dissipation side 30°C / 35°C (EN14511:2013)

(2) η efficiency values for heating and cooling are respectively calculated by the following formulas: $[\eta = SCOP / 2,5 - F(1) - F(2)]$ e $[\eta = SEER / 2,5 - F(1) - F(2)]$. For further information, please refer to the technical document "ErP 2009/125/EC DIRECTIVE" in the catalogue introducing pages, or to the EN14825:2017 regulation.


(3) Water temperature - user side 40°C / 45°C, water temperature - source side 10°C / 7°C (EN14511:2013)

(4) Seasonal energy efficiency class for LOW TEMPERATURE room heating under AVERAGE climatic conditions [EUROPEAN REGULATION No 811/2013]

(5) Sound power level measured according to ISO 9614

DIMENSIONAL DRAWINGS

WRE 52 - 92

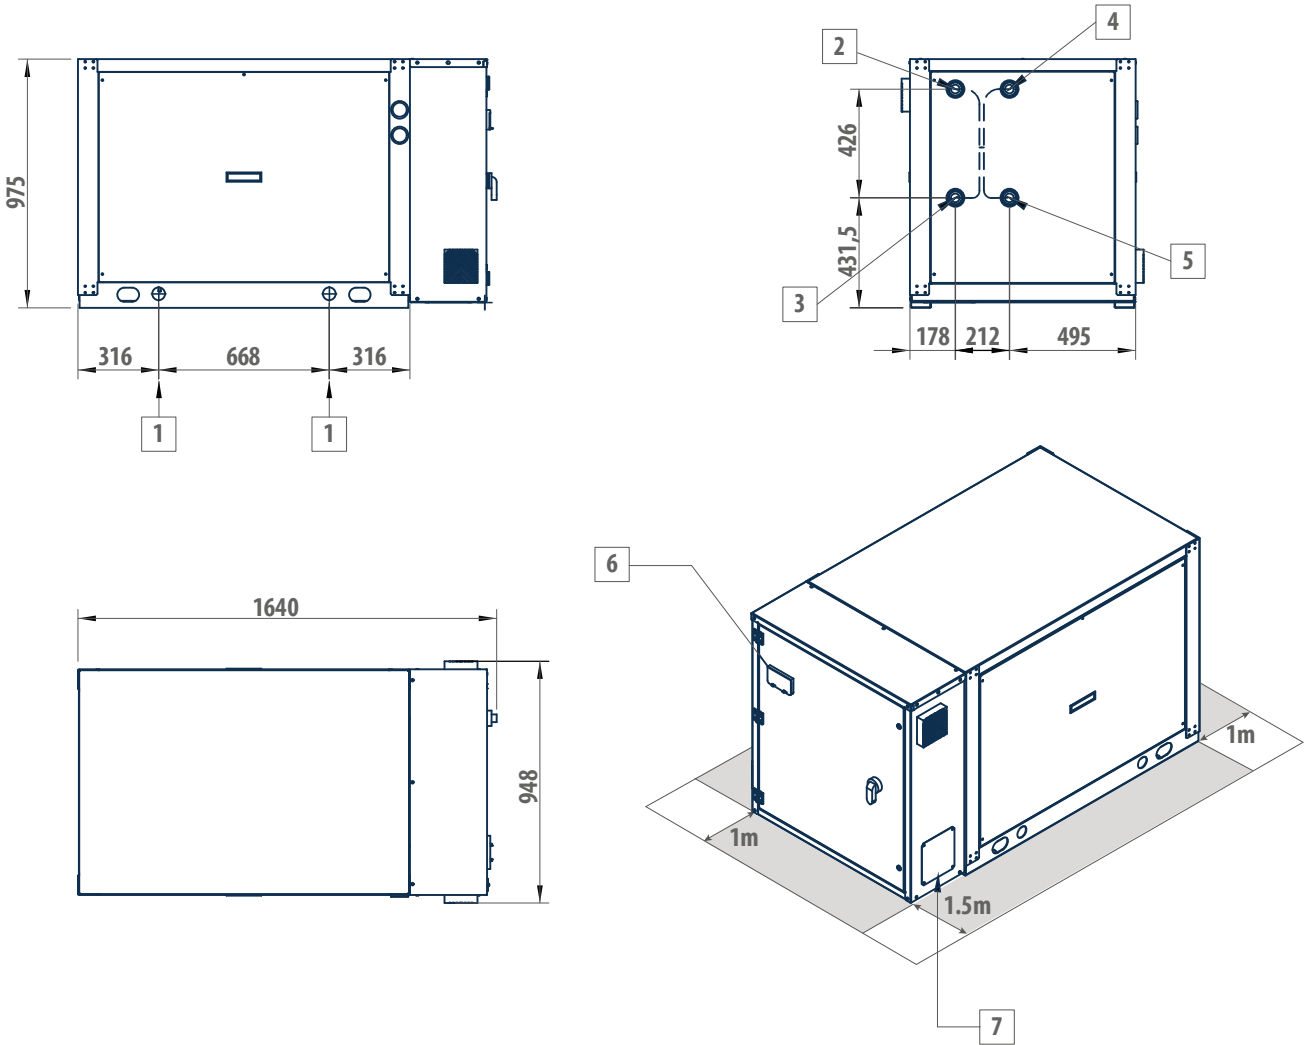

LEGENDA WRE CS

1	Lifting points
2	Dissipation side - outlet (Victaulic 2")
3	Dissipation side - inlet Victaulic (Victaulic 2")
4	User side - inlet (Victaulic 5")
5	User side - outlet (Victaulic 2")
6	User interface
7	Power supply input


LEGENDA WRE HS

1	Lifting points
2	Dissipation side - inlet Victaulic (Victaulic 2")
3	Dissipation side - outlet (Victaulic 2")
4	User side - inlet (Victaulic 5")
5	User side - outlet (Victaulic 2")
6	User interface
7	Power supply input

Water chillers and heat pumps WRE

DIMENSIONAL DRAWINGS

WRE 122 - 242

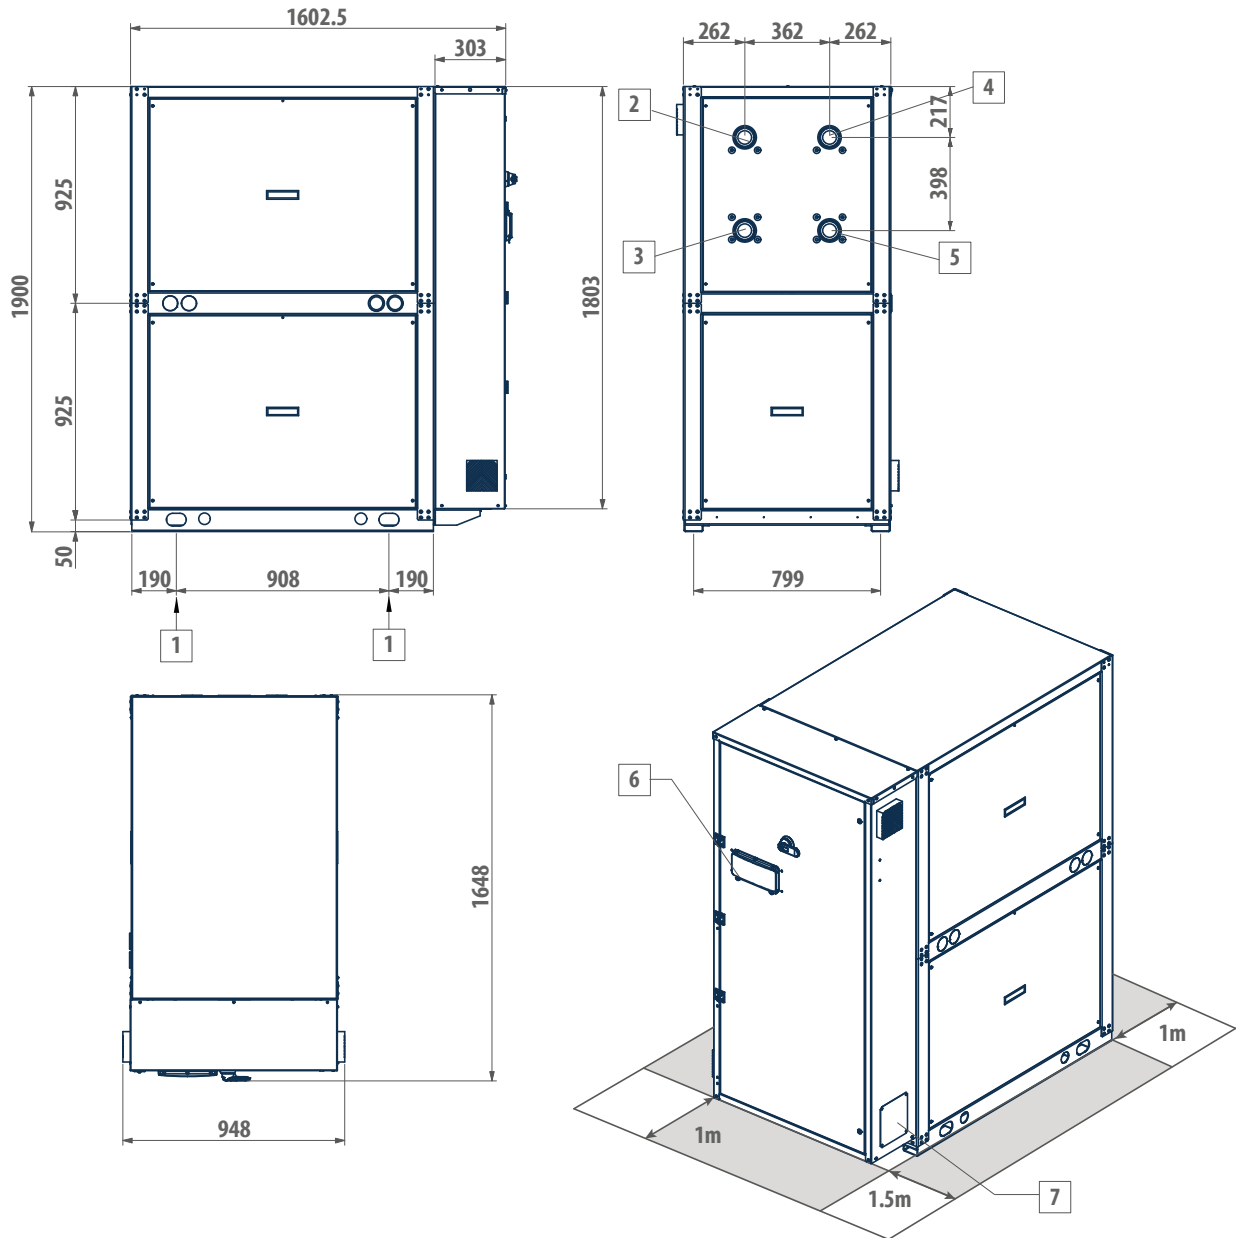

LEGENDA WRE CS


1	Lifting points
2	Dissipation side - outlet (Victaulic 3")
3	Dissipation side - inlet (Victaulic 3")
4	User side - inlet (Victaulic 3")
5	User side - outlet (Victaulic 3")
6	User interface
7	Power supply input

LEGENDA WRE HS

1	Lifting points
2	Dissipation side - inlet (Victaulic 3")
3	Dissipation side - outlet (Victaulic 3")
4	User side - inlet (Victaulic 3")
5	User side - outlet (Victaulic 3")
6	User interface
7	Power supply input

DIMENSIONAL DRAWINGS

WRE 154-274; 302

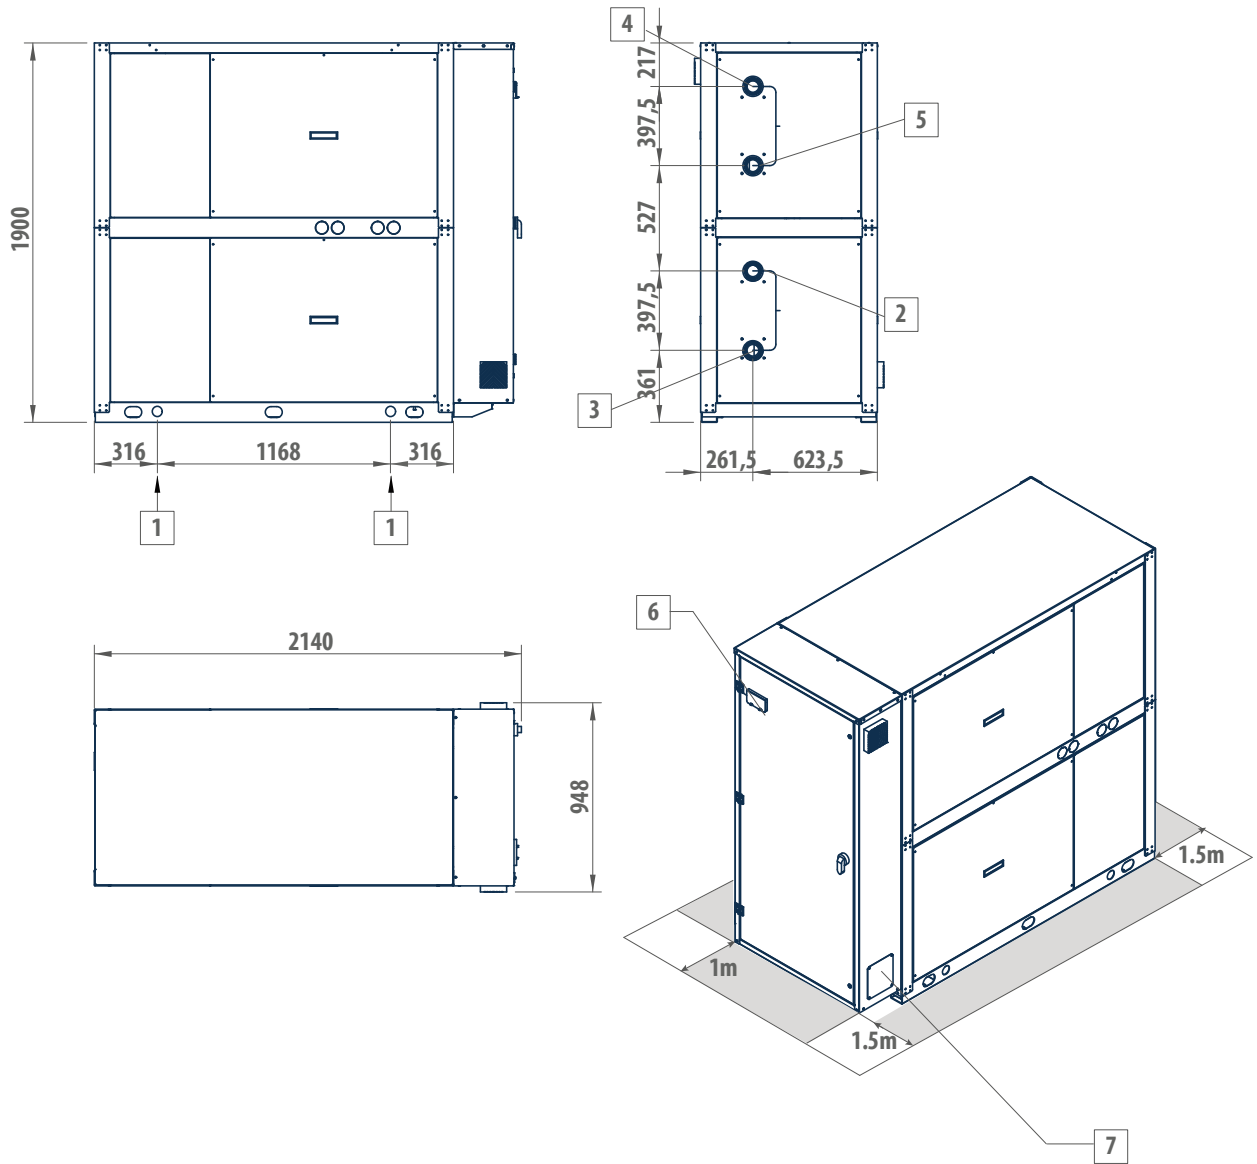

LEGENDA WRE CS


1	Lifting points
2	Dissipation side - outlet (Victaulic 3")
3	Dissipation side - inlet (Victaulic 3")
4	User side - inlet (Victaulic 3")
5	User side - outlet (Victaulic 3")
6	User interface
7	Power supply input

LEGENDA WRE HS

1	Lifting points
2	Dissipation side - inlet (Victaulic 3")
3	Dissipation side - outlet (Victaulic 3")
4	User side - inlet (Victaulic 3")
5	User side - outlet (Victaulic 3")
6	User interface
7	Power supply input

DIMENSIONAL DRAWINGS

WRE 314 - 564

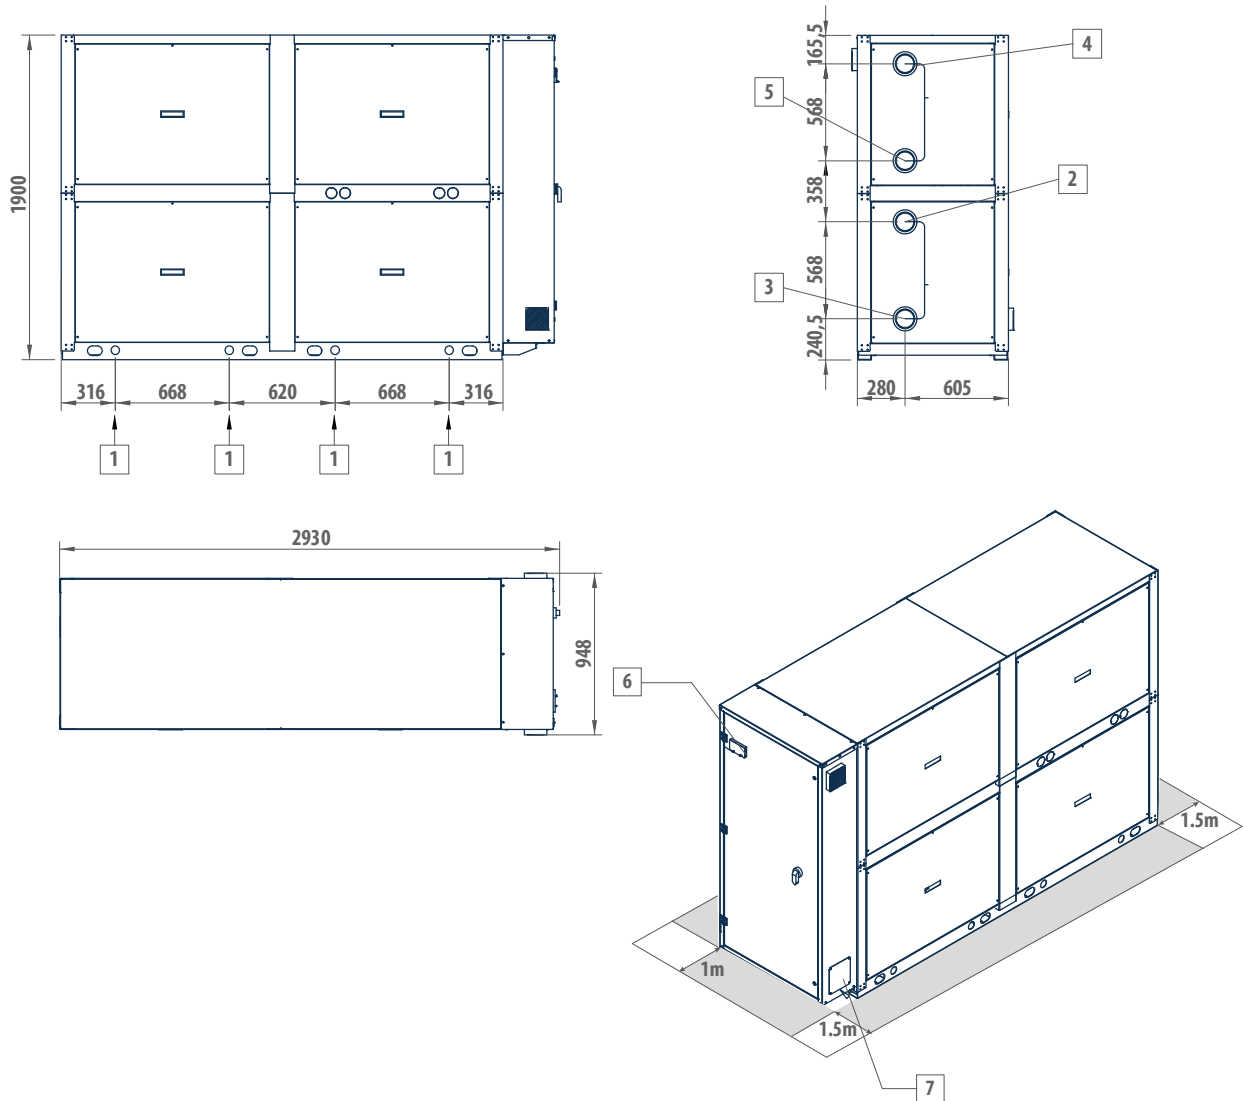

LEGENDA WRE CS


1	Lifting points
2	Dissipation side - outlet (Victaulic 4")
3	Dissipation side - inlet (Victaulic 4")
4	User side - inlet (Victaulic 4")
5	User side - outlet (Victaulic 4")
6	User interface
7	Power supply input

LEGENDA WRE HS

1	Lifting points
2	Dissipation side - inlet (Victaulic 4")
3	Dissipation side - outlet (Victaulic 4")
4	User side - inlet (Victaulic 4")
5	User side - outlet (Victaulic 4")
6	User interface
7	Power supply input

DIMENSIONAL DRAWINGS

WRE 606 - 746

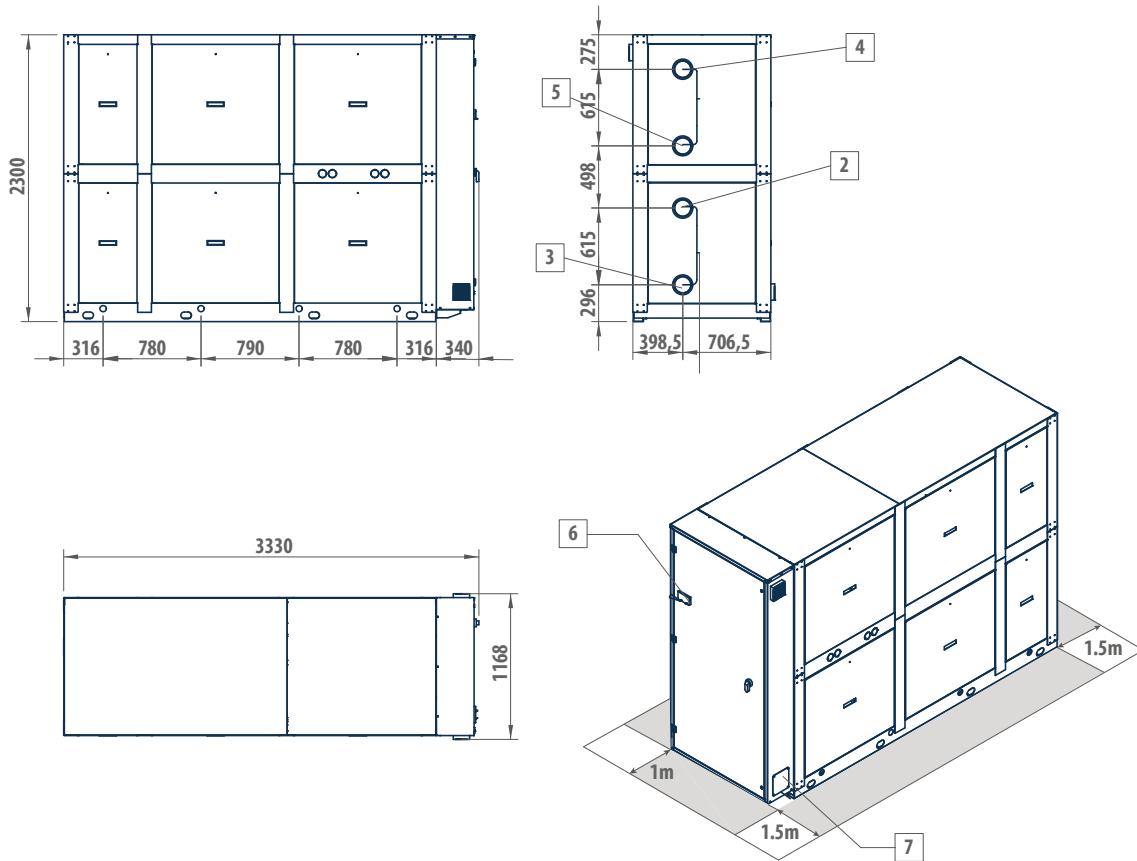

LEGENDA WRE CS

1	Lifting points
2	Dissipation side - outlet (Victaulic 5")
3	Dissipation side - inlet (Victaulic 5")
4	User side - inlet (Victaulic 5")
5	User side - outlet (Victaulic 5")
6	User interface
7	Power supply input

LEGENDA WRE HS

1	Lifting points
2	Dissipation side - inlet (Victaulic 5")
3	Dissipation side - outlet (Victaulic 5")
4	User side - inlet (Victaulic 5")
5	User side - outlet (Victaulic 5")
6	User interface
7	Power supply input